

CERAMICSPEED

NGI Ceramic Hybrid Bearing Assemblies


INCH



Certified Hygienic Bearing Flange Housings- INCH

The only patented bearing house in the world, hygienically designed and certified by EHEDG, 3-A, and USDA standards, with extremely easy access for cleaning from all angles.

- Designed in accordance with EHEDG and 3-A design principles to meet and exceed the demands of modern production lines.
- Equipped with CeramicSpeed Hybrid Bearings which are fitted with premium-quality ceramic (Si3N4) balls. These ceramic balls are twice as hard as steel, 4 times smoother, and require much less lubrication.
- The bearing house provides a patented waterproof sealing that allows for 3 degrees of misalignment and can be equipped with a high-performance ceramic bearing lubricated for life, offering 4-8 times extended lifetime.
- Produced in high-quality glass fiber-reinforced Grilamid.
- Designed with a smooth and round surface, making it impossible for bacteria and water to penetrate.

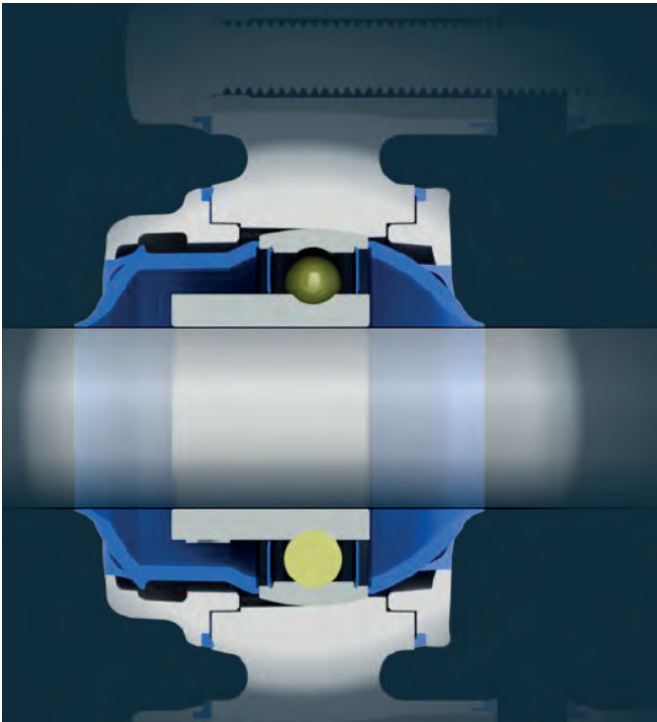



Hygienic Housings with Ceramic Hybrid Bearings

Our bearings are pre-installed in the bearing houses and we currently offer 4 types - stainless steel or ceramic hybrid bearing with screws or locking collar.


NGIs certified hygienic bearing houses with IP69K sealing provide the ideal environment for the bearing and are therefore suitable for maintenance-free operation.

The main operating parameters that determine the lifetime of the bearing are bearing type and size, load, speed, operating temperature, shaft tolerances.

Our ball bearings are greased-for-life with high-performance multi-purpose grease designed specifically for the lubrication of food processing machinery all sealed-for-life by seals made from FDA-approved blue NBR.

The locking method with screws is the most common locking function.

Bearings with an eccentric locking collar are intended primarily for use in applications where the direction of rotation is constant. On one side of the bearing inner ring is an eccentric extension that fits the locking collar.

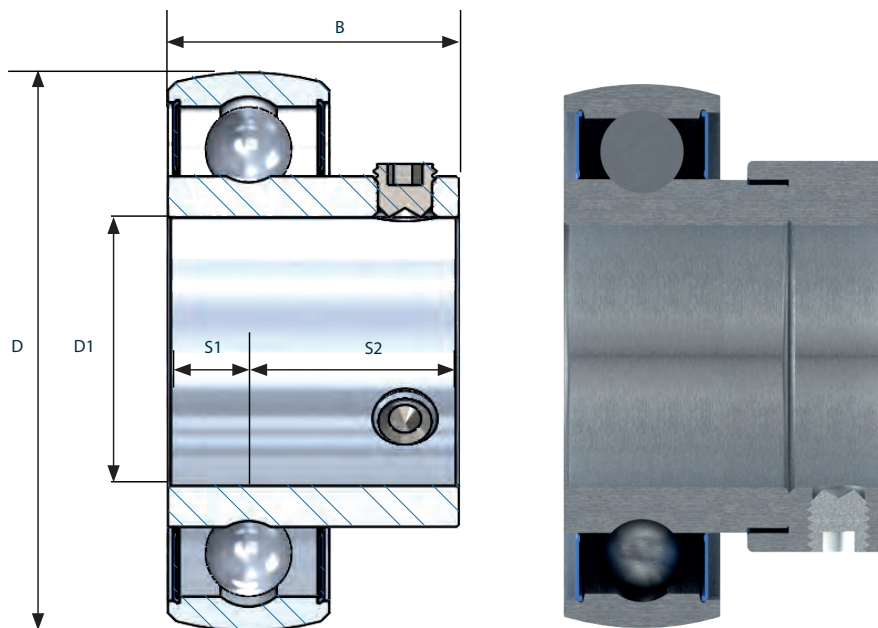

Locking function	Size D [in]	Shaft Diameter D1 [in]	Width B [in]	Distance S1 [in]	Max Speed bearing [R/MIN]*	Static Load Rating Co [N]	Dynamic load rating C [N]	Item Code
With Screws	1.85	3/4	0.98	0.71	4800	4032	10370	CSB1905
With Screws	2.05	1	1.06	0.77	4200	4776	11310	CSB2540
With Screws	2.44	1 1/4	1.18	0.87	3780	6912	15730	CSB3175
With Screws	2.83	1 3/8	1.34	0.96	3150	9344	20830	CSB3493
With Screws	3.15	1 1/2	1.46	1.04	2750	10880	23550	CSB3810
With Locking Collar	1.85	3/4	0.98	0.71	4800	4032	10370	CSA1905
With Locking Collar	2.05	1	1.06	0.77	4200	4776	11310	CSA2540
With Locking Collar	2.44	1 1/4	1.18	0.87	3780	6912	15730	CSA3175
With Locking Collar	2.83	1 3/8	1.34	0.96	3150	9344	20830	CSA3493
With Locking Collar	3.15	1 1/2	1.46	1.04	2750	10880	23550	CSA3810

* The hygienic bearing house is typically used on conveyors rotating at relatively low speeds (below 2000 rpm), the housing creates a hygienic environment for the bearing, and it would be optimal to mount it on an AISI hard surface between 0.8 µm and 1.6 µm Ra with a tolerance not exceeding h9, preferably lower.


Superior to Steel

The CeramicSpeed Balls are 15% harder, take 99% higher loads, and are more than 100% smoother than other ceramic balls typically seen in the market. Ceramic balls can be found in a variety of materials. The best material available - and the one used for our bearings - is silicon nitride (Si₃N₄).

Ceramic balls are superior to steel balls in all physical measurable properties. This ensures many benefits in the bearing: The increased hardness of the ball means that the contact area between the ball and the track is reduced leading to lower friction, higher potential speeds, and less energy waste. The hardness and the extremely smooth surface also mean that the balls are far more durable than steel balls. Ceramic balls are also significantly lighter than steel balls which reduces the centrifugal load on the raceway as the bearing spins, and wear and tear are significantly reduced, keeping the bearing in top condition for longer. As an added benefit the bearing can operate at much higher RPMs - up to 50 % higher - giving the possibility of using long-life bearings in demanding high-speed applications, such as machine tool spindles and turbomachinery.

One of the main advantages of ceramic balls over steel ones is their low friction coefficient - this reduces the need for lubrication significantly. In low-to-moderate speeds and loads, they can often run lubrication-free.


XB2FC

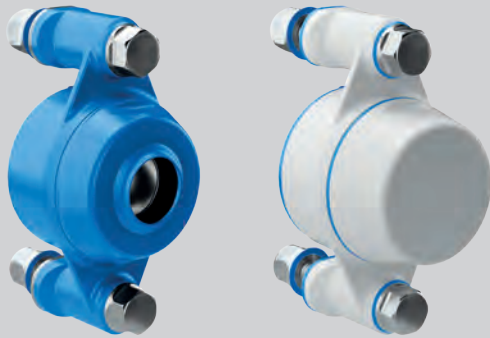

Special features

- 2 hole flange bearing house
- Mounted parallel to shaft direction
- Shaft diameter 3/4 in - 1 1/2 in
- Can be supplied with certified hygienic nuts and bolts for maximum hygienic safety


XB4FC

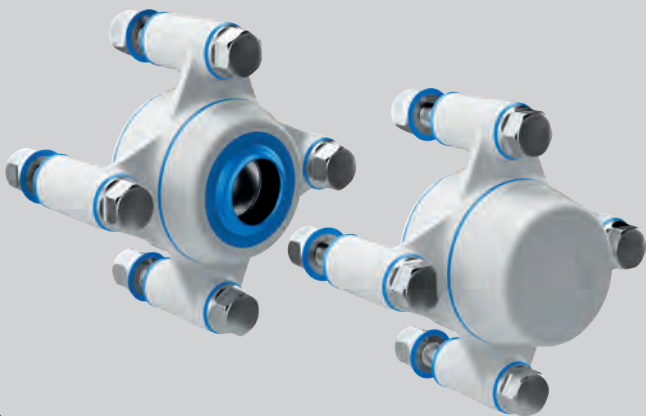

Special features

- 4 hole flange bearing house
- Mounted parallel to shaft direction
- Shaft diameter 3/4 in-1 1/2 in
- Can be supplied with certified hygienic nuts and bolts for maximum hygienic safety


XB3FC

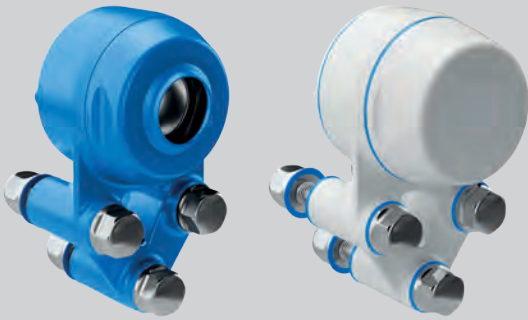

Special features

- 3 hole flange bearing house
- Mounted parallel to shaft direction
- Shaft diameter 3/4 in - 1 1/4 in.
- Can be supplied with certified hygienic nuts and bolts for maximum hygienic safety

XBPBC

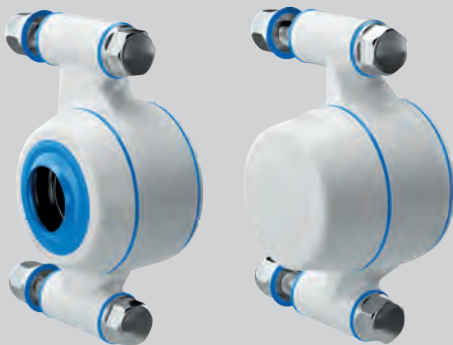

Special Features

- Pillow block bearing house
- Mounted perpendicularly to shaft direction
- Shaft diameter 1 in - 1 1/4 in
- Can be supplied with certified hygienic nuts and bolts for maximum hygienic safety.

XB2FC

Certified Hygienic Flange Bearing Housings

The design and patent protected XB2FC 2-hole flange bearing house is the optimal choice for machinery and equipment that has to comply with strict hygiene requirements.

The XB2FC bearing house is mounted parallel to shaft direction

The XB2FC is designed to provide easy access for cleaning from all angles. We recommend that you choose a bearing house with NGI's hygienic nuts and bolts for maximum hygienic safety.

The XB2FC meets the requirements of EC 1935/2004, EC 10/2011, EC 2023/2006 and FDA.





Certified
Hygienic



Minimized
Cleaning Time



Minimized Water
Usage

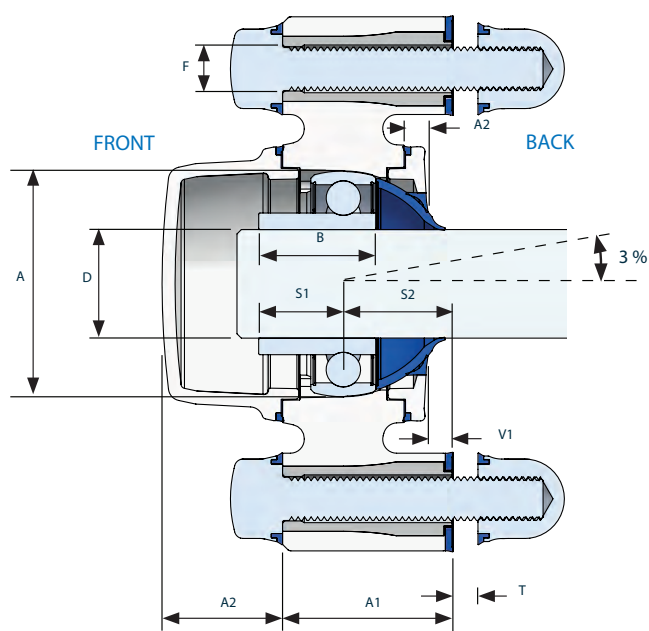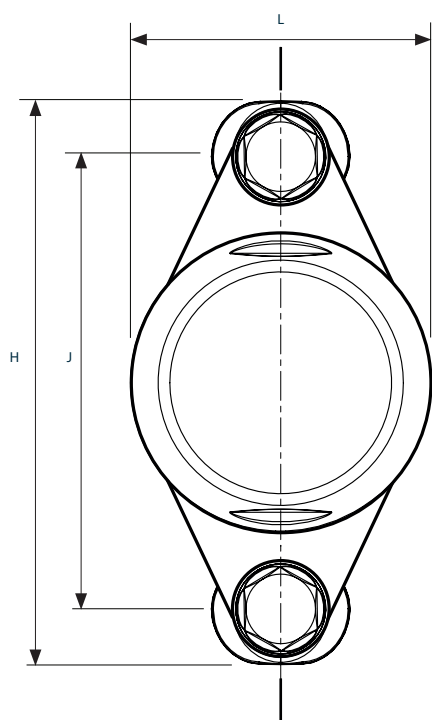

CERAMICSPEED



Product code	Bearing house	Bearing type	Front cover	Back cover	Bolt (optional)
Example	XB2FC52-	SSB2500-	CL(W)-	OS(W)-	BXHM1050

Bearing House



Size A [in]	Shaft Diameter D [in]	V1 [in]	J [in]	F [in]	H [in]	L [in]	A1 [in]	S2 [in]	Item Code
1.85	3/4	0.3	3.54	0.4	4.5	2.28	1.42	0.94	XB2FC47
2.05	1	0.25	3.9	0.4	4.84	2.59	1.54	0.98	XB2FC52
2.44	1 1/4	0.26	4.59	0.4	5.7	3.14	1.63	1.06	XB2FC62
2.83	1 3/8	0.28	5.12	0.48	6.31	3.61	1.83	1.18	XB2FC72
3.15	1 1/2	0.29	5.65	0.48	6.93	4	1.97	1.26	XB2FC80

Bearing Type



Bearing Ball material	Shaft Diameter D [in]	Width B [in]	Distance S1 [in]	Maximum Speed Sealing [R/Min]	Static Load Rating C ₀ [N]	Dynamic Load rating C [N]	Item Code
Stainless steel w. screws	3/4	0.98	0.71	1875	5040	10370	SSB1905
Stainless steel w. screws	1	1.06	0.77	1500	5970	11310	SSB2540
Stainless steel w. screws	1 1/4	1.18	0.87	1250	8640	15730	SSB3175
Stainless steel w. screws	1 3/8	1.34	0.96	1070	11680	20830	SSB3493
Stainless steel w. screws	1 1/2	1.46	1.04	940	13600	23550	SSB3810

Cover



Size A [in]	Shaft Diameter D [in]	OS [Open Small] A2	OM [Open medium] A2	CM [Closed Medium] A2	CL [Closed Large] A2
1.85	3/4	0.18	0.57	0.66	-
2.05	1	0.18	0.57	0.68	1.08
2.44	1 1/4	0.23	0.8	0.92	1.41
2.83	1 3/8	0.25	0.77	0.91	-
3.15	1 1/2	0.26	0.88	1.03	-

Nut and Bolt



Color	Color Code
White	(W)
Blue	(B)
Black	(S)



XB3FC

Certified Hygienic Flange Bearing Housings

The design and patent protected XB3FC 3-hole flange bearing house is the optimal choice for machinery and equipment that has to comply with strict hygiene requirements.

The XB3FC bearing house is mounted parallel to shaft direction

The XB3FC is designed to provide easy access for cleaning from all angles. We recommend that you choose a bearing house with NGI's hygienic nuts and bolts for maximum hygienic safety.

The XB3FC meets the requirements of EC 1935/2004, EC 10/2011, EC 2023/2006 and FDA.





Certified Hygienic



Minimized Cleaning Time



Minimized Water Usage

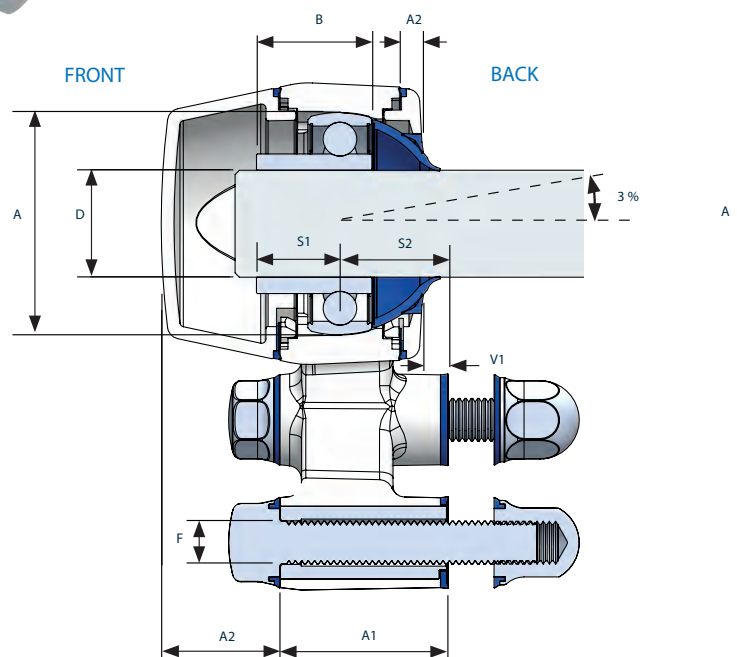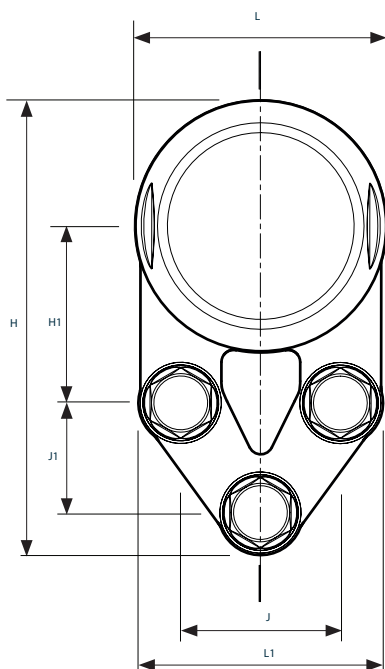



Product code	Bearing house	Bearing type	Front cover	Back cover	Bolt (optional)
Example	XB3FC52-	SSB2500-	CL(W)-	OS(W)-	BXHM1050

Bearing House



Size A [in]	Shaft Diameter D [in]	V1 [in]	J [in]	J1 [in]	F [in]	H [in]	H1 [in]	L [in]	L1 [in]	A1 [in]	S2 [in]	Item Code
1.85	3/4	0.3	1.5	0.87	0.4	4.13	1.69	2.27	2.36	1.42	0.94	XB3FC47
2.05	1	0.25	1.63	1.12	0.40	4.66	1.81	2.58	2.50	1.54	0.98	XB3FC52
2.44	1 1/4	0.26	1.87	1.26	0.40	5.41	2.07	3.13	2.85	1.63	1.06	XB3FC62
2.83	1 3/8	-	-	-	-	-	-	-	-	-	-	XB3FC72
3.15	1 1/2	-	-	-	-	-	-	-	-	-	-	XB3FC80

Bearing Type



Bearing Ball material	Shaft Diameter D [in]	Width B [in]	Distance S1 [in]	Maximum Speed Sealing [R/Min]	Static Load Rating C ₀ [N]	Dynamic Load rating C [N]	Item Code
Stainless steel w. screws	3/4	0.98	0.71	1875	5040	10370	SSB1905
Stainless steel w. screws	1	1.06	0.77	1500	5970	11310	SSB2540
Stainless steel w. screws	1 1/4	1.18	0.87	1250	8640	15730	SSB3175
Stainless steel w. screws	-	-	-	-	-	-	-
Stainless steel w. screws	-	-	-	-	-	-	-

Cover



Size A [in]	Shaft Diameter D [in]	OS [Open Small] A2	OM [Open medium] A2	CM [Closed Medium] A2	CL [Closed Large] A2
1.85	3/4	0.18	0.57	0.66	-
2.05	1	0.18	0.57	0.68	1.08
2.44	1 1/4	0.23	0.8	0.92	1.41
-	-	-	-	-	-
-	-	-	-	-	-

Nut and Bolt



Color	Color Code
White	(W)
Blue	(B)
Black	(S)



XB4FC



Certified Hygienic Flange Bearing Housings

The design and patent protected XB4FC 4-hole flange bearing house is the optimal choice for machinery and equipment that has to comply with strict hygiene requirements.

The XB4FC bearing house is mounted parallel to shaft direction

The XB4FC is designed to provide easy access for cleaning from all angles. We recommend that you choose a bearing house with NGI's hygienic nuts and bolts for maximum hygienic safety.

The XB4FC meets the requirements of EC 1935/2004, EC 10/2011, EC 2023/2006 and FDA.

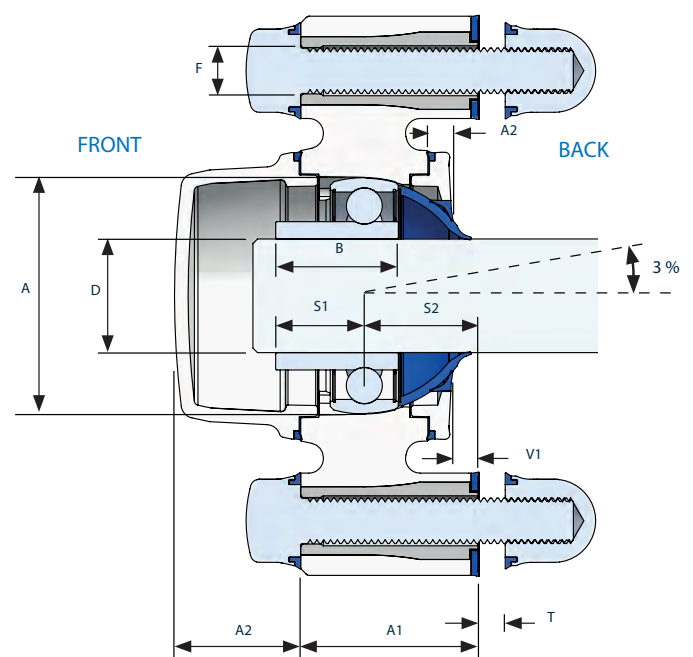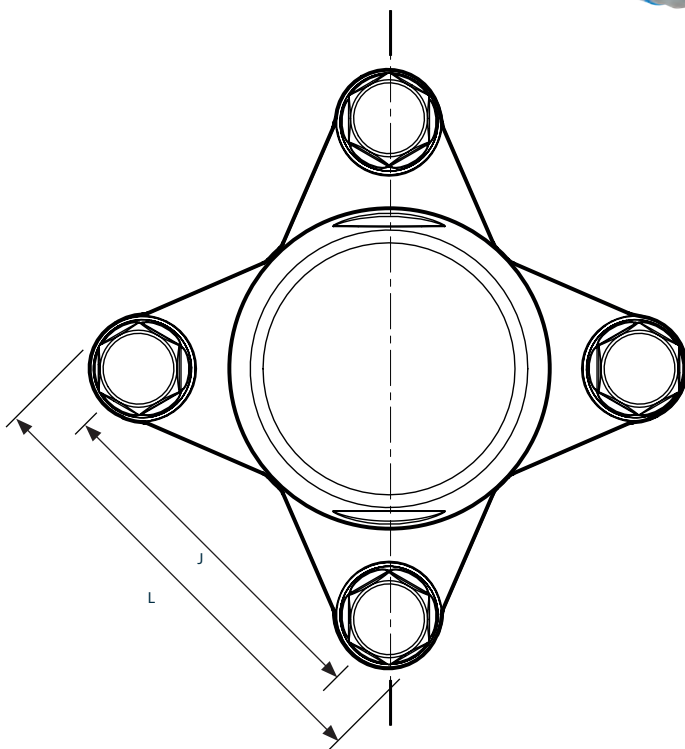



Product code	Bearing house	Bearing type	Front cover	Back cover	Bolt (optional)
EXAMPLE	XB4FC52-	SSB2500-	CL(W)-	OS(W)-	BXHM1050

Bearing house



Size A [in]	Shaft Diameter D [in]	V1 [in]	J [in]	F [in]	L [in]	A1 [in]	S2 [in]	Item Code
1.85	3/4	0.3	2.5	0.4	3.33	1.42	0.94	XB4FC47
2.05	1	0.25	2.76	0.4	3.62	1.54	0.98	XB4FC52
2.44	1 1/4	0.26	3.25	0.4	4.3	1.63	1.06	XB4FC62
2.83	1 3/8	0.28	3.62	0.48	4.69	1.83	1.18	XB4FC72
3.15	1 1/2	0.29	4	0.48	5.15	1.97	1.26	XB4FC80

Bearing Type



Bearing Ball material	Shaft Diameter D [in]	Width B [in]	Distance S1 [in]	Maximum Speed Sealing [R/Min]	Static Load Rating C ₀ [N]	Dynamic Load rating C [N]	Item Code
Stainless steel w. screws	3/4	0.98	0.71	1875	5040	10370	SSB1905
Stainless steel w. screws	1	1.06	0.77	1500	5970	11310	SSB2540
Stainless steel w. screws	1 1/4	1.18	0.87	1250	8640	15730	SSB3175
Stainless steel w. screws	1 3/8	1.34	0.96	1070	11680	20830	SSB3493
Stainless steel w. screws	1 1/2	1.46	1.04	940	13600	23550	SSB3810

Cover



Size A [in]	Shaft Diameter D [in]	OS [Open Small] A2	OM [Open medium] A2	CM [Closed Medium] A2	CL [Closed Large] A2
1.85	3/4	0.18	0.57	0.66	-
2.05	1	0.18	0.57	0.68	1.08
2.44	1 1/4	0.23	0.8	0.92	1.41
2.83	1 3/8	0.25	0.77	0.91	-
3.15	1 1/2	0.26	0.88	1.03	-

Nut and Bolt



Color	Color Code
White	(W)
Blue	(B)
Black	(S)



XBPBC

Certified Hygienic Flange Bearing Housings

The design and patent protected XBPBC 2-hole block full bearing house is the optimal choice for machinery and equipment that has to comply with strict hygiene requirements.
The XB4FC bearing house is mounted parallel to shaft direction

The XBPBC is designed to provide easy access for cleaning from all angles. We recommend that you choose a bearing house with NGI's hygienic nuts and bolts for maximum hygienic safety.

The XB4FC meets the requirements of EC 1935/2004, EC 10/2011, EC 2023/2006 and FDA.





Certified
Hygienic



Minimized
Cleaning Time



Minimized Water
Usage

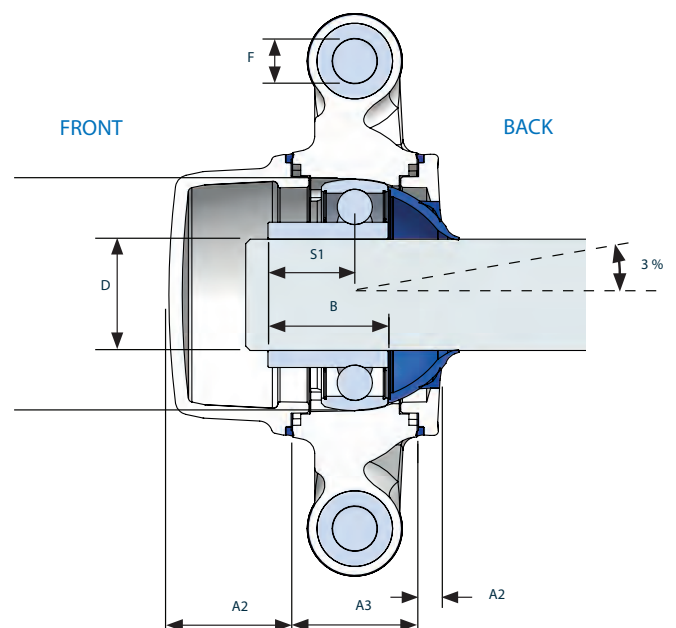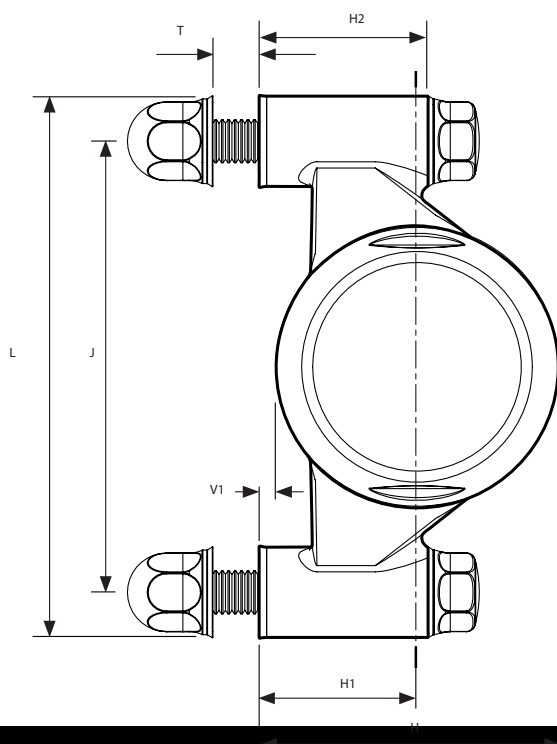



Product code	Bearing house	Bearing type	Front cover	Back cover	Bolt (optional)
EXAMPLE	XB4FC52-	SSB2500-	CL(W)-	OS(W)-	BXHM1050

Bearing House



Size A [in]	Shaft Diameter D [in]	V1 [in]	J [in]	F [in]	H [in]	H1 [in]	H2 [in]	L [in]	A3 [in]	Item Code
1.85	3/4	0,17	3,78	0,40	2,45	1,31	1,42	4,61	0,94	XPBPC47
2.05	1	0.14	4.13	0.40	2.73	1.44	1.54	4.96	1.10	XPBPC52
2.44	1 1/4	0.12	4.76	0.40	3.26	1.69	1.63	5.75	1.14	XPBP062
2,83	1 3/8	0,07	4,96	0,48	3,68	1,87	1,83	5,98	1,30	XPBPC72
-	-	-	-	-	-	-	-	-	-	XPBPC80

Bearing Type



Bearing Ball Material	Shaft Diameter D [in]	Width B [in]	Distance S1 [in]	Maximum Speed Sealing [R/Min]	Static Load Rating C ₀ [N]	Dynamic Load rating C [N]	Item Code
Stainless steel w. screws	3/4	0.98	0.71	1875	5040	10370	
Stainless steel w. screws	1	1.06	0.77	1500	5970	11310	SSB2540
Stainless steel w. screws	1 1/4	1.18	0.87	1250	8640	15730	SSB3175
Stainless steel w. screws	1 3/8	1.34	0.96	1070	11680	20830	-
Stainless steel w. screws	-	-	-	-	-	-	-

Cover



Size A [in]	Shaft Diameter D [in]	OS [Open Small] A2	OM [Open medium] A2	CM [Closed Medium] A2	CL [Closed Large] A2
1.85	3/4	0.18	0.57	0.66	-
2.05	1	0.18	0.57	0.68	1.08
2.44	1 1/4	0.23	0.8	0.92	1.41
2.83	1 3/8	0.25	0.77	0.91	-
3.15	-	-	-	-	-

Nut and Bolt



Color	Color Code
White	(W)
Blue	(B)
Black	(S)





CeramicSpeed Stainless/Ceramic Hybrid Bearings offer exceptional corrosion resistance, 4-8 x's more life, require less lubrication (slow-to-moderate loads and speeds often run lubrication-free), 10-20 times lower friction reduces heat, extending lubrication life by 3-4 times. Lower friction means lower energy cost per unit.

LM-Tarbell Inc.
140 Industrial Drive
East Longmeadow,
Massachusetts 01028

☎ 1-800-513-3163 Cell: 617-538-8756 Mike Quinn

✉ mquinn@LM76.com

www.FDABEARINGS.com



CERAMICSPEED